

3-Point Soil Conditioner



Our 3-Point Soil Conditioner is an attachment that pays for itself in a very short amount of time by replacing your hand labor work crew. This versatile unit rakes stones and debris to either side or straight ahead for easy pickup. The aggressive teeth on the large-diameter rotor pulverize soil like an ordinary tiller, with the benefit of faster ground speed. The counter-rotating rotor moves soil ahead of it as it tills, filling in low spots and chewing off high spots.



THE 3-POINT SOIL CONDITIONER SEPARATES ROCKS, TEARS UP SOD, AND PULVERIZES DIRT CLOTS




SELF-ADJUSTING SLIP CLUTCHES PROVIDE DRIVELINE PROTECTION FROM OVERLOAD



THE AGGRESSIVE TEETH ON THE LARGE-DIAMETER ROTOR PULVERIZE SOIL LIKE AN ORDINARY TILLER, WITH THE BENEFIT OF FASTER GROUND SPEED



Take a Picture of This QR Code With
Your Smart Phone to See it in Action

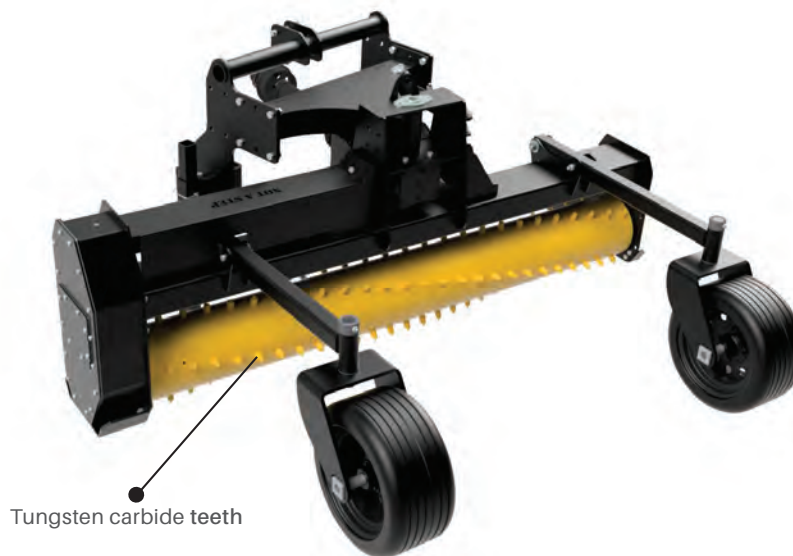

Tungsten carbide teeth

FEATURES & BENEFITS

- Driveline slip clutch protection
- Tungsten - carbide teeth
- Power angling (optional)
- Large solid rubber wheels
- Rubber shields
- Teeth are welded in a spiral pattern

SPECIFICATIONS / OPTIONS

Model	SC72	SC84	SC96
Part Number	920012	920014	920015
Rotor Width	72"	84"	96"
Overall Width	83"	95"	107"
Angling	15° manual	15° manual	15° manual
Wheels/Tires	18 x 8.5 polyurethane	18 x 8.5 polyurethane	18 x 8.5 polyurethane
Teeth	88 carbide tipped	104 carbide tipped	104 carbide tipped
Hitch Category	Cat. I & II	Cat. 1 & II	Cat. 1 & II
Weight	1,355 lb.	1,430 lb.	1,505 lb.
Rotor Diameter	10"	10"	10"
Rotor Speed	187 RPM	187 RPM	187 RPM

Options

Hydraulic Angling Package w/hoses/couplers

Wing Kit

* For more specification details please see our website www.erskineattachments.com